


Appliance JET 4 ENTRY LEVEL

| | | TCP | UDP | |
|----------|---------|-----------|-----------|----------|
| | | Banda | Banda | Jitter |
| NO VPN | Routing | 2396 Mbps | 2447 Mbps | 0,007 ms |
| Open VPN | AES128 | 99 Mbps | 210 Mbps | 0,747 ms |
| | AES256 | 91 Mbps | 218 Mbps | 0,704 ms |
| IPSec | AES128 | 329 Mbps | 344 Mbps | 0,151 ms |
| | AES256 | 330 Mbps | 344 Mbps | 0,134 ms |

* performance misurate su una singola NIC da 2,5 Gbps / performance measured on a single 2,5 Gbps NIC

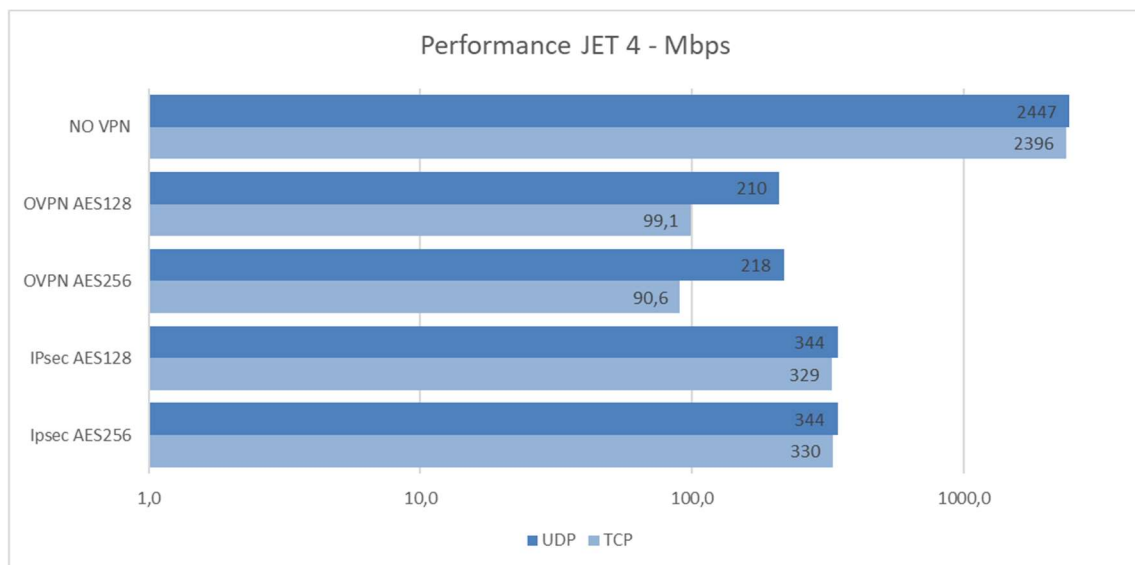

Jitter: In the context of computer networks, jitter is the variation in latency as measured in the variability over time of the packet latency across a network. A network with constant latency has no variation (or jitter).[3] Packet jitter is expressed as an average of the deviation from the network mean latency. However, for this use, the term is imprecise. The standards-based term is "packet delay variation" (PDV).[4] PDV is an important quality of service factor in assessment of network performance.

Deepen jitter: <http://en.wikipedia.org/wiki/Jitter>