


Appliance NEW 4 ENTRY LEVEL – N5105

		TCP	UDP	
		Banda	Banda	Jitter
NO VPN	Routing	927 Mbps	949 Mbps	0,086 ms
Open VPN	AES128	199 Mbps	290 Mbps	0,528 ms
	AES256	181 Mbps	280 Mbps	0,602 ms
IPSec	AES128	141 Mbps	205 Mbps	0,319 ms
	AES256	141 Mbps	203 Mbps	0,302 ms

* performance misurate su una singola NIC da 1 Gbps / performance measured on a single 1 Gbps NIC

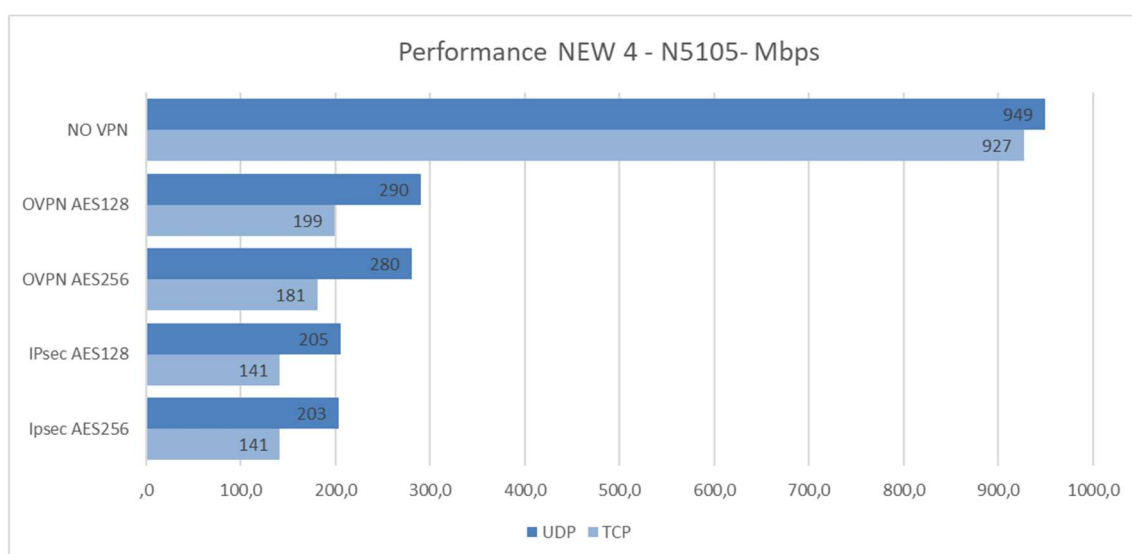

Jitter: In the context of computer networks, jitter is the variation in latency as measured in the variability over time of the packet latency across a network. A network with constant latency has no variation (or jitter).[3] Packet jitter is expressed as an average of the deviation from the network mean latency. However, for this use, the term is imprecise. The standards-based term is "packet delay variation" (PDV).[4] PDV is an important quality of service factor in assessment of network performance.

Deepen jitter: <http://en.wikipedia.org/wiki/Jitter>